

# A Novel Swarm Intelligence Algorithm For The Evacuation Routing Optimization Problem

Jinlong Zhu<sup>1</sup>, Wenhui Li<sup>2</sup>, Huiying Li<sup>2</sup>, Qiong Wu<sup>2</sup>, Liang Zhang<sup>2</sup>

<sup>1</sup>Department of Computer Science and Technology, ChangChun Normal University, China

<sup>2</sup>Department of Computer Science and Technology, Jilin University, China

**Abstract:** This paper presents a novel swarm intelligence optimization algorithm that combines the evolutionary method of particle swarm optimization with the filled function method in order to solve the evacuation routing optimization problem. In the proposed algorithm, the whole process is divided into three stages. In the first stage, we make use of global optimization of filled function to obtain optimal solution to set destination of all particles. In the second stage, we make use of the randomness and rapidity of particle swarm optimization to simulate the crowd evacuation. In the third stage, we propose three methods to manage the competitive behaviors among the particles. This algorithm makes an evacuation plan using the dynamic way finding of particles from both a macroscopic and a microscopic perspective simultaneously. There are three types of experimental scenes to verify the effectiveness and efficiency of the proposed algorithm: a single room, a 4-room/1-corridor layout, and a multi-room multi-floor building layout. The simulation examples demonstrate that the proposed algorithm can greatly improve upon evacuation clear and congestion times. The experimental results demonstrate that this method takes full advantage of multiple exits to maximize the evacuation efficiency.

**Keywords:** PSO, filled function, global optimum, local optimum.

Received November 17, 2014; accepted September 19, 2015

## 1. Introduction

Emergency evacuation plans are developed to ensure the safest and most efficient evacuation time of all expected residents of a structure or region [8, 9, 19]. With the increasing complexity of buildings and frequency of disasters, the evacuation routing optimization problem has become a hot topic in the area of emergency evacuation planning. The problem can be divided into the microscopic and the macroscopic perspectives. To better characterize crowd behaviors for egress analysis, microscopic pedestrian models have been developed during recent decades where an evacuee's behavior, psychological status can be modeled and simulated. Ha et al. [13] considered motivational force, psychological repulsive tendencies, compression, viscous damping, personal force and sliding friction in the simulation of specific emergency evacuations. The motion of individuals was governed by the social-force model to investigate the effect of crowd evacuation. Matthew et al. [12] considered an agent-based approach to estimate formation of bottlenecks during urgent evacuation. The work of Xiaoping Zheng et al. [16 - 18] focused on evacuees' cooperative and competitive behaviors by using a close analogy to the Chicken-type game. Jun Tanimoto, Aya Hagishima and Yasukaka Tanaka [15] proposed a deductive approach to analyze the bottleneck problems of pedestrian evacuation by using a close analogy to the saint&temptation reciprocity game. Dong-Mei Shi and Binghong Wang [4] proposed a microscopic framework

to research crowd dynamics based on the modified lattice gas model by using snowdrift game theory. Ha et al. [5] proposed an Agent-based modeling of a multi-room multi-floor building emergency evacuation. Particle Swarm Optimization (PSO) [1, 6 and 20] is a multi-agent based simulation method that can simulate complex behaviors of individuals in an urgent evacuation. However, such microscopic models only take the evacuees' local behavior into account, omitting other factors which may be of equal importance for them. In addition, microscopic simulations are computationally complex, making it difficult to be used directly for optimizing evacuation strategies. On the other hand, some researchers have studied evacuation planning from a macroscopic perspective. Chooramun et al. [2] developed an evacuation model utilizing hybrid space discretization, which uses a mixture of three basic techniques for space discretization, namely coarse networks, fine networks, continuous networks.. However, these methods only considered the global evacuation plan and ignored the influence of the behavior of individuals while simulating the evacuation behavior. Modeling the dynamic way finding of evacuees with respect to both the macroscopic and microscopic perspectives simultaneously is rare. Therefore, the present study proposes a novel PSO algorithm to optimize evacuation routing from these two perspectives simultaneously.

This study addresses two issues. The first is how to optimize particles' competitive behaviors. The second issue is how to determine optimal evacuation routes for particles. We present the "global/local particle swarm optimization" (GLPSO) algorithm for multi-exit evacuation, intended to plan an optimal egress route based on global and local optimum nodes. The main contribution of this method provides a new perspective to understand the optimal control of emergency evacuation. The proposed method can improve evacuation clearance time and decrease crowd density in determining emergency evacuation strategies. In addition, it can take full advantage of multiple exits in order to obtain the safest evacuation route.

The remainder of this paper is organized as follows. Section II introduces the state of the art in evacuation planning. Section III presents the result of the optimization. Section IV concludes this paper and describes the outlook on future studies.

## 2. The Description of PSO Algorithm

The PSO algorithm is based on swarm intelligence [5]. The movements of the particles are determined by their own best known position in the search-space as well as the entire swarm's best known position. An improved PSO algorithm is then:

*Algorithm 1: The improved PSO algorithm.*

### 1. Initialization

Initialize the particles' positions randomly with a uniform probability. Initialize the particles' best known positions to their initial positions. Initialize the particles' velocities

### 2. Get destination node

Compute destination node of each particle by a filled function (described in Section 2.1).

### 3. Global optimum node and Local optimum node

Compute the global optimum node of each particle using the destination node. Compute the local optimum node of each particle according to the global optimum node.

### 4. Update velocity

Update the velocity of each particle:

$$\mathbf{v}_{id}^{k+1} = \omega \mathbf{v}_{id}^k + c_1 r_1 (\mathbf{p}_{id}^k - \mathbf{x}_{id}^k) + c_2 r_2 (\mathbf{g}_{id}^k - \mathbf{x}_{id}^k)$$

If  $\mathbf{v}_{id}^{k+1} > \mathbf{v}_{id}^{\max}$ ,  $\mathbf{v}_{id}^{k+1} = \mathbf{v}_{id}^{\max}$

If  $\mathbf{v}_{id}^{k+1} < 0$ ,  $\mathbf{v}_{id}^{k+1} = \mathbf{v}_{id}^{\max}$

### 5. Conflict detection

Predict the particle's position:  $\mathbf{x}_{id}^{k+1} = \mathbf{x}_{id}^k + \mathbf{v}_{id}^{k+1}$

Calculate the distance  $d$  between two particles. Determine whether the positions conflict. If  $d < 2r$ , then go to Step 6, else go to Step 7.

### 6. Conflict resolution

According to distance  $d$ , the GLPSO model optimizes conflicts by locating each particle's position using three methods: ConflictMethod1, ConflictMethod2 or ConflictMethod3 (described in Section 2.3).

### 7. Update position

Update all particles' position.

### 8. Terminal condition

If a particle moves to the next neighbor node, then go to Step 3, if a particle passes through an exit, then the termination criterion of that particle is met. Else go to Step 4.

The flowchart of the solution process is presented in Figure 1.

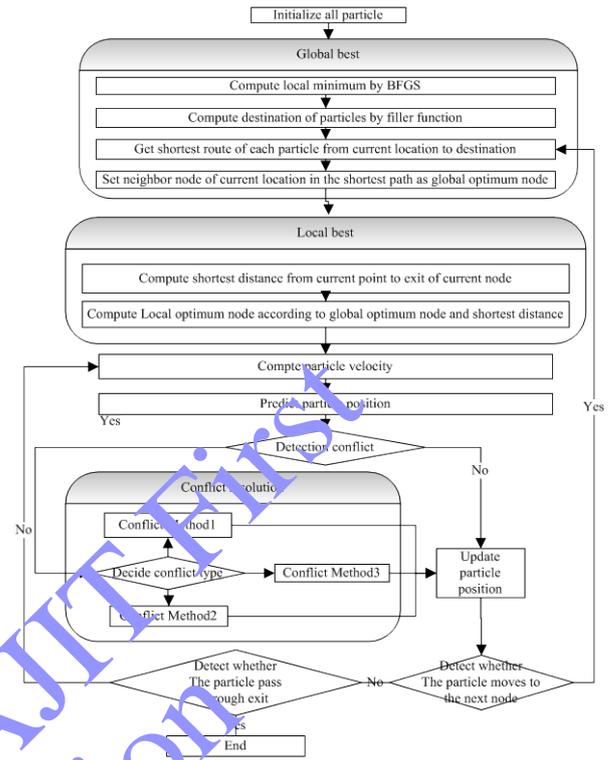


Figure 1. The flow chart of improved PSO model

## 2.1 Particle Destination Nodes

In this paper, the concept of a filled function [11, 14] is introduced. This method is designed to obtain the particles' destination node. First, we treat all the evacuees of a node (e.g. a room) as a "whole entity" and assign them to each exit by Formulas 1. According to the evacuee distribution, the length of the escape routes and the maximum flow rate, an estimate of evacuation clearance time must be taken into account with an expectation of the reaction of other evacuees at the same exits. We obtain the destination of particles with the following formula:

$$\min T(x_1, x_2, \dots, x_n) = \sum_{i=1}^n (T_{jam}^i + x_i / r_i + d_i * x_i / \sum S_n) * (1 - e^{-x_i}) \quad (1)$$

$$s.t. 0 \leq x_i \leq P, i \in n, \sum x_i = P$$

$\min$  represents the minimizing function value and "subject to" is abbreviated by "s.t."

$x_i$  is the number of particles in the  $i$ th exit.

$r_i$  is the maximum flow rate of the  $i$ th exit.

$d_i$  is the distance from current node to the  $i$ th exit.

$x_i / \sum S_n$  is average speed.

$T_{jam}^i$  is congestion time.

Equation 2 is the transformation formulation of the minimum evacuation clearance time to reduce the computational complexity.

$$T(x_1, x_2, \dots, x_n) = \sum_{i=1}^{n-1} (T_{jum}^i + x_i / r_i + d_i * x_i / \sum_{m=1}^p S_m) * (1 - e^{-x_i}) + \quad (2)$$

$$(T_{jum}^i + (P - \sum_{i=1}^{n-1} x_i) / r_n + d_i * (P - \sum_{i=1}^{n-1} x_i) / \sum_{m=1}^p S_m) * (1 - e^{-\sum_{i=1}^{n-1} x_i})$$

We obtain the optimal evacuation plan using this filled function method, which is an approach to solve unconstrained global minimization problems. The filled function handles Formulas 1 to arrive at the global minimum by breaking the algorithm into a two-step process.

We obtain the optimal evacuation plan using this filled function method, which is an approach to solve unconstrained global minimization problems. The filled function handles Formulas 1 to arrive at the global minimum by breaking the algorithm into a two-step process.

- **Step1.** According to Wolfe-Powell conditions, we get the local minimum  $x_1$  of the function  $T(x_1, x_2, \dots, x_n)$  using the BFGS [3, 21] algorithm, which approximates Newton's method in multiple dimensions efficiently. The BFGS method is a standard iterative method for solving unconstrained nonlinear optimization problems using the following procedure.

*Algorithm 2: The BFGS method*

1. **Initialization**  
Set the initial point  $x_0$ , define a positive definite matrix  $H_0$ , the tolerance  $\mathcal{E} > 0$ , and an iterator  $k=0$ .
2. **Terminal condition**  
If  $\|g_k\| \leq \mathcal{E}$ , then  $x_k$  is the optimal solution.
3. **Linear search**
  - a. Compute the search direction  $d_k = -H_k g_k$ .
  - b. Calculate the factor  $a_k$  of the step length using a linear search, and set  $x_{k+1} = x_k + a_k d_k$ .
  - c. Correct  $H_k$  to get  $H_{k+1}$ , set  $k=k+1$ , and go to Step 2.

The iteration solution formula of H is given by

$$H_{k+1} = \left( I - \frac{\delta_k \gamma_k^T}{\delta_k^T \gamma_k} \right) H_k \left( I - \frac{\gamma_k s_k^T}{\delta_k^T \gamma_k} \right) + \frac{\delta_k \delta_k^T}{\delta_k^T \gamma_k} \quad (3)$$

Where,  $\delta_k = x_{k+1} - x_k$ ,  $\gamma_k = g_{k+1} - g_k$ .

- **Step 2.** Here,  $x_1$  is the outcome of Step 1, which yields a local minimum of  $T(x_1, x_2, \dots, x_n)$ . We construct a filling function  $fill(x)$  on the local minimum  $x_1$ , and take random a point as the initial point in the neighborhood of  $x_1$ . If there is a field below  $x_1$ ,  $x_m$  is a point in the field found by minimizing  $fill(x)$ . Then go to Step1, using the  $x_m$  which minimizes  $T(x_1, x_2, \dots, x_n)$  as the initial point to get a new local minimum value  $x_2$ , and iterate, each time using a different local minimum as the initial point.

*Algorithm 3: The global minimum method*

1. **Initialization**

Read parameter values,  $\mathcal{E} > 0$ ,  $0 < \delta < 1$ ,  $a > 0$ ,  $S \subset R^n$ .  $\mathcal{E}$  is allowable error,  $\delta$  is a point with an offset,  $a$  is the parameter of the filled function, and  $S$  is a region containing all the minima of  $T(x_1, x_2, \dots, x_n)$ .

2. **Local minimum point**  
Set  $x' \in S$  as the initial point, then use Algorithm 1 to arrive at a local minimum point  $x_1$  of  $T(x_1, x_2, \dots, x_n)$ .
3. **Construct filling function**  
Set  $fill(x)$  as the filled function of  $T(x_1, x_2, \dots, x_n)$  near the local minimum  $x_1$ .  
Set initial point using the rule  $x_{i0} = x_1 + (-1)^i \delta e_{\lfloor \frac{i+1}{2} \rfloor}$ ,  $i=1, 2, \dots, 2n$ . Where,  $e_i$  ( $i=1, 2, \dots, n$ ) is the  $i$ th unit vector.
4. **Terminal condition**  
If minimizations of the filled function traverse all of the iteration points for any given initial point in the region  $S$ , then the algorithm terminates, and  $x_1$  is the global optimum of  $T(x_1, x_2, \dots, x_n)$ .  
We assume that  $y_k$  is a randomly point in the lower area, when the iterative point  $y_k$  meet any of following condition. Set  $x' = y_k$ , and go to Step 5.
  - a.  $d_{k-1}^T \nabla v(y_k) \geq 0$ ,  $d_{k-1}^T$  is the search direction of  $y_{k-1}$ .
  - b.  $(y_k - x_1)^T \nabla fill(y_k) \geq 0$
  - c.  $\|\nabla v(y_k)\| < \epsilon$
  - d.  $f(y_k) < f(x_1)$
5. **Minimization function**  
Set  $x'$  as initial point to get a new local minimum value  $x_2$ . If  $f(x_2) < f(x_1)$ , then set  $x_1 = x_2$  and go to Step 3, or else set  $a = 10a$  and go to Step 4.  
GLPSO sets the destination of each particle in the node by the result of function  $T(x_1, x_2, \dots, x_n)$ .

## 2.2. Global Optimum Node and Local Optimum Node

Each particle's movement is influenced by both its local best position and global best position. The global best position is equal to the local best position in a global optimum node. The Global optimum node is the neighbor node of the current location in the shortest path to the destination. The local best position is guided toward the best positions (such as exit and door) with the global optimum node in the search-space of the current node.

Jiyeong Lee and MeiPo Kwan [10] proposed a Node Relation Structure (NRS) to represent buildings' internal structure. NRS abstracts the complex topological relationships among 3D features to a logical network structure. However, this model can't describe rooms or corridors containing exits. Since the presence of these exits can affect particles' behavior in their emergency response, obtaining optimal evacuation routes with such a 3D network analysis is difficult. We improved NRS to add exit and door nodes for obtaining the global optimum node and the local optimum node. We represent the architectural


structure with a hierarchical undirected graph  $G = (V, E)$ , consisting of a finite set  $V$  of particles (nodes) and a finite set  $E$  of edges.

There can be emergency evacuations in multi-room or multi-floor buildings. We present a hierarchical undirected graph model to extend the nodes into a subgraph, subsequently abstracting them into a super graph. This building has two levels of graphs (see Figure 3).


For example, consider a two-story building in which each story has seven rooms, one hallway, and one stairway (see Figure 2a). Suppose there is an exit in the first floor (see Figure 2b). This building has 18 enclosures (nine per story), which we label P1 to P16. E1 to E17 represent doors, and E8 is the Exit. S1 and S2 are stairways. We transform the 3D spatial units to 2D polygons. Figure 2b shows all spatial units on the first story.

We construct the node relationships from this abstracted layout. The node relationships take the center point of each spatial unit as the location of the corresponding node. The edges connecting the nodes represent the connectivity among the spatial units. The extended subgraph presents the first story's extended node relations (see Figure 2c). If we set hallway P8 as a node, the Local optimal node can't accurately calculate the path distances according to the route length. Thus, we find the intersection point of the door centerline and the corridor centerline as an extended node to get an accurate distance (such as P81).


The supergraph comprises two levels of subgraph and the stairway represents the connectivity among the subgraphs (see Figure 3). A boundary node stands for each story's stairway node or an exit node.

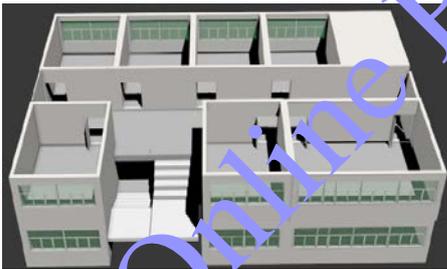

a) 3D building model.

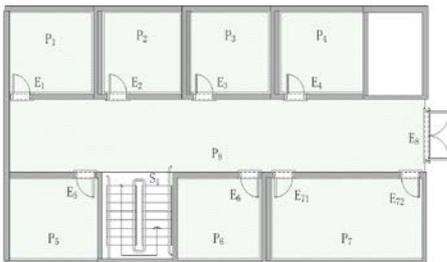

b) A plane graph of one story.

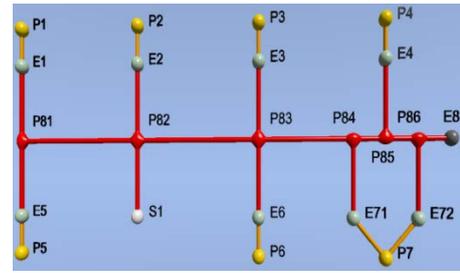

c) The node-relation structure model of the simple node relationship with extended nodes.

Figure 2. A 3D building model and its hierarchical relation structure.

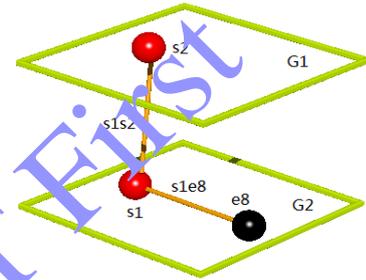


Figure 3. The abstracted supergraph, with each story abstracted to its boundary nodes

Here are the relationships:

$$SG = (G_c, G)$$

$$G = (G_1, G_2)$$

$$G_1 = (V_1, E_1), V_1 = \{s_2\}, E_1 = \{\circ\}$$

$$G_2 = (V_2, E_2), V_2 = \{s_1, e_8\}, E_2 = \{s_1e_8\}$$

$$G_c = (V_c, E_c), V_c = \{s_1, s_2\}, E_c = \{s_1s_2\},$$

Where  
 SG is supergraph set,  $G_c$  is a supergraph,  $G$  is a subgraph set, and  $G_1$  and  $G_2$  are subgraphs.  
 $s_1, s_2$  and  $e_8$  are boundary nodes.  
 $s_1s_2$  is the connectivity between the supergraph's boundary nodes.

We seek an optimum route whose total distance is the minimum to the destination node. The global optimum node is the neighborhood node of the current location in the optimum route.

### 2.3. Conflict Problem Optimization

In the process of evacuation, there is competitive behavior between the particles. The perception of hazards can stress people in crowds, evoke their competitive response, and trigger blocking as they attempt to pass through narrow passages [7] (e.g., a small exit) simultaneously. We propose a mechanism to manage competitive behavior in three manners as shown in Figure 4.

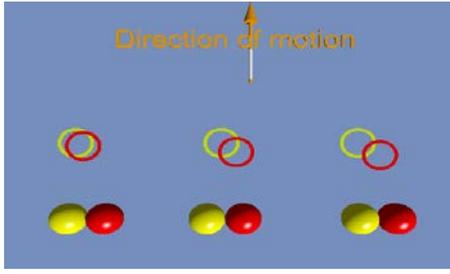


Figure 4. Three competitive behaviors between the particles

We determine three types of conflict with the distance between the particles.  $r$  is radius of particle and  $d$  is the distance between the center of a circle of two particles. That is

$$\begin{cases} \text{if } 0 < d < r/2, & \text{then ConflictMethod1} \\ \text{if } r/2 \leq d < 5r/4, & \text{then ConflictMethod2} \\ \text{if } 5r/4 \leq d < 2r, & \text{then ConflictMethod3} \end{cases} \quad (4)$$

a. *ConflictMethod1*: There are five particles to compete a position in the first type of conflict problem (see Figure 5). The red balls are evacuees and the yellow circle is an empty location. We put forward six strategies to solve the conflict between the particles as shown in Figure 5 (a), (b), (c), (d), (e), (f).

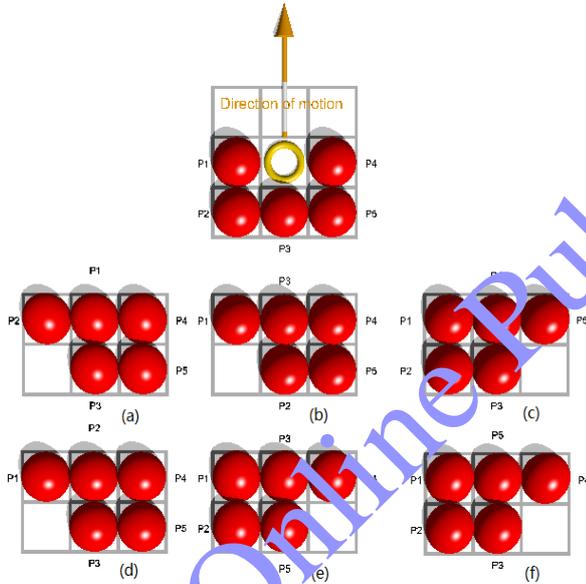


Figure 5. Study of the competitive behavior of ConflictMethod1 . (a) P1 move to empty location, (b) P3 move to empty location and P2 move to P3, (c) P4 move to empty location, (d) P3 move to empty location and P5 move to P3, and (f) P5 move to empty location.

P1, ..., P5 are five conflict particles in Figure5, and their movement strategies comply with the following combination rules.

Table 1. Constraint pattern for conflict method1

Constraint	Description
When P2 or P5 move to position empty location.	P1, P3 and P4 stay in the same place
When P1 or P4 move to position empty location.	The optimal position for P2 and P5 are P1' position and P4' position, respectively.
When P3 move to position empty location.	P2 or P5 move to P3' position.

We calculate the probability of each particle and form a probability table for each movement strategy. We tabulate the probability according to particle velocity  $s$  and particle number  $d$  behind the current particle. The probability function can be written as:

$$p(s_i, d_i) = P(s_i) * P(d_i) \quad (5)$$

$$P(s_i) = \frac{s_i}{\sum_{j=1, j \neq i}^n s_j} \quad (6)$$

$$P(d_i) = d_i / \sum_{j=1}^n d_j \quad (7)$$

According to the probability table, we adopt the minimum entropy principle to decide which strategy to utilize. Conflict Method1 sets  $S = \{S_1, S_2, \dots, S_n\}$  as a collection of mutually exclusive natural states. The collection of subjective probability distributions is defined as

$$\Delta S = \{P_i = (p_{i1}, \dots, p_{in}) \mid \Pr_i(s_j) = p_{ij}, i = 1, \dots, m;$$

$j = 1, \dots, n\}$ . This is a finite set, where  $\Pr_i(s_j)$  is the initial subjective probability about strategy  $s_j$ . The modeling process consists of the following four steps.

1. Compute information entropy, which is given by

$$H(P_i) = -\sum_{j=1}^n p_{ij} \ln p_{ij}, i = 1, 2, \dots, m$$

2. If  $\min_{1 \leq i \leq m} H(P_i) = H(P_{i_0}) (1 \leq i_0 \leq m)$ , then  $P_{i_0}$  is outcome

;

If  $\min_{1 \leq i \leq m} H(P_i) = H(P_{i_1}) = \dots = H(P_{i_r}) = s (r \geq 2)$ . then

$$\text{compute } P_{i_0} = \sum_{k=1}^r P_{i_k} / r$$

3. If  $H(P_{i_0}) < s$ ,  $P_{i_0}$  is outcome;

If  $s \leq H(P_{i_0}) \leq s + \ln r$ , then randomly choose  $i_t$  and set  $P_{i_t}$  as outcome in  $i_1, i_2, \dots, i_r (1 \leq t \leq r)$ .

4. Set movement strategy of particles with outcome and combination rules.

b. *ConflictMethod2*: PSO calculates the movement positions of the particles in the next iteration. When the predicted position of two particles meet a collision condition, ConflictMethod2 first evaluates their priority according to the fitness distance, then computes the optimal position of the particles.

In Figure 6,  $P_a$  and  $P_b$  are two particles,  $r$  is the particle radius,  $P_b'$  is the predicted position of  $P_b$ .  $r_1$  is the fitness distance,  $r_2$  equals  $2r$ ,  $r_4$  equals the velocity of






Figure 8. The single room

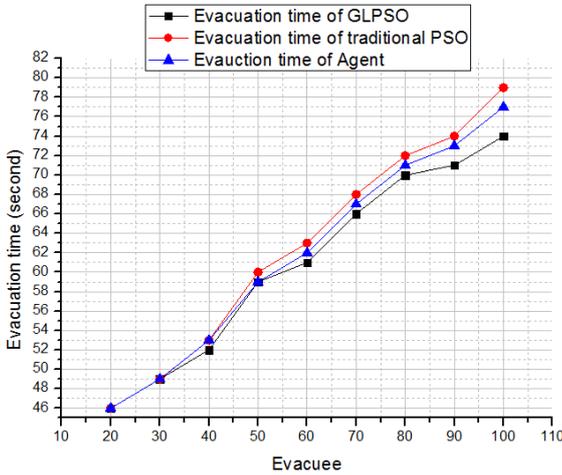


Figure 9. The evacuation time vs. evacuee

This experiment is to test the validity of the evacuation time. Fig. 9 shows the evacuation time of each method. The black curve is the average evacuation time for the GLPSO method. The red curve is the average evacuation time for the Agent method. The blue curve is the average evacuation time for the traditional PSO method. With the increase of the number of evacuees, the average evacuation time for the GLPSO model is obviously smaller than the other two algorithms.

- *Scenario 2.* This scenario studies an egress scenario in which four groups of people are guided to three exits within a small planar layout (as shown Figure 10).

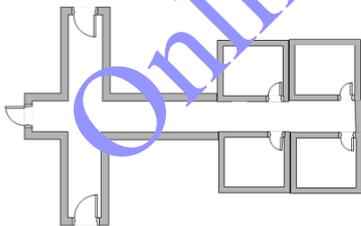


Figure 10. Exiting pattern for a 4-room/1-corridor layout

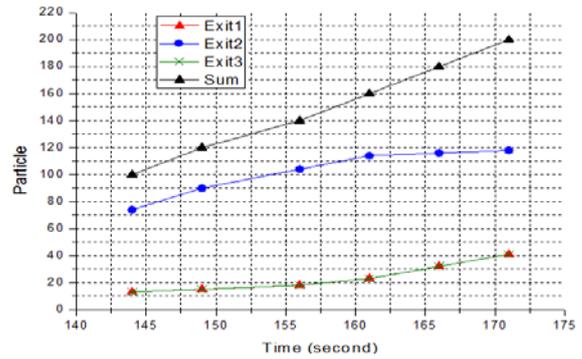


Figure 11. Optimal allocation of particle to the three exit by GLPSO

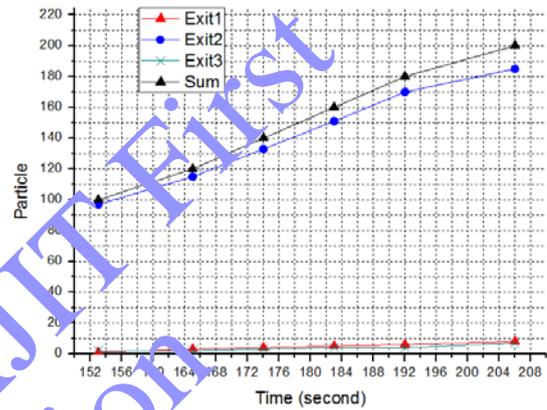


Figure 12. Optimal allocation of particle to the three exit by the nearest exits

This experiment is to test the optimal choice for multi-exit scenarios. One of the main objectives of forecasting evacuation times is the optimization of the allocation of people and areas to the various available exits. Fig. 11, Fig. 12 and Fig. 13, are the optimal allocations of each method in a plan. The evacuation times to Exits 1, 2 and 3 are shown in the red, blue, and green curves, respectively. The black curve is the total evacuation time for the GLPSO strategy.

Fig. 11, Fig. 12 and Fig. 13 show evacuation planning for the three algorithms. The results show that the different of the optimal allocation of particles between Exit1 and other exits increases with increase in the number of particles. On the other hand, GLPSO and Game theory exhibit a slowly-rising trend as a function of particle number. The evacuation time estimated by GLPSO is less than Game theory. Therefore, in total, the plan made by GLPSO is better than that of the other two algorithms.

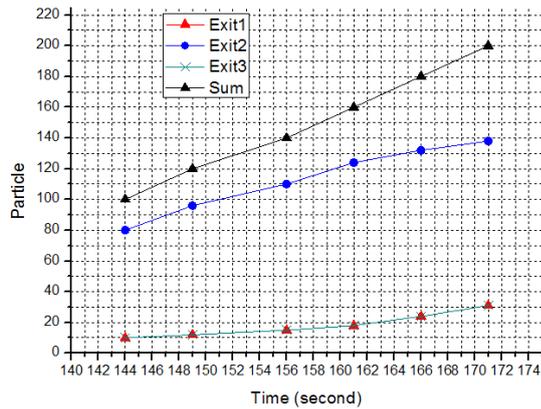


Figure 13. Optimal allocation of particle to the three exit by game theory

### Scenario 3:

This example studies an egress scenario in which 780 pedestrians are guided to exits within a multi-room, multi-floor building (as shown in Figure 16).


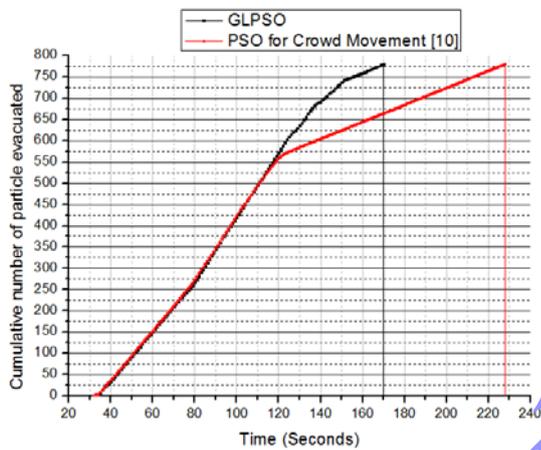



Figure 14. Evacuation curves of two algorithms.

Figure 14 shows the evacuation curves of two algorithms. For GLPSO, 100% of particles have been evacuated out of the building at 170 seconds. However, using PSO for Crowd movement model, 229 seconds elapsed before all particles were evacuated. The cumulative number of particles evacuated is different between the two models by 112 seconds. This is a result of GLPSO taking full advantage of multiple exits to evacuate particles.


Figure 15 shows the evacuation time for each exit in a plan. In the case of the GLPSO algorithm, the simulation output shows an evacuation plan with a maximum evacuation time of 170 seconds at Exit 1, and a minimum evacuation time of 140 seconds at Exit 4. The PSO algorithm results in a maximum evacuation time of 230 seconds at Exit 1 and a minimum evacuation time of 114 seconds at Exit 4. Obviously, a reasonable planning can take full advantage of multiple exits and drastically improve the evacuation time. The simulation output of GLPSO provides a more rational result than PSO for crowd movement model because the different values and the maximum evacuation times are smaller.

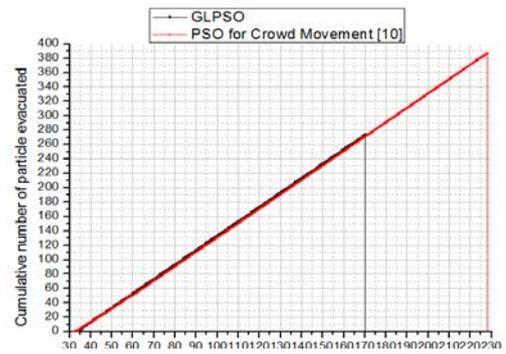


(a)

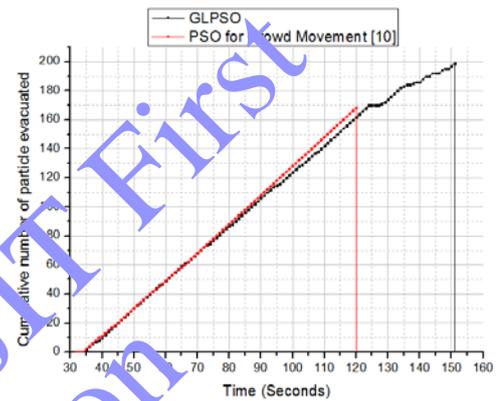

(b)

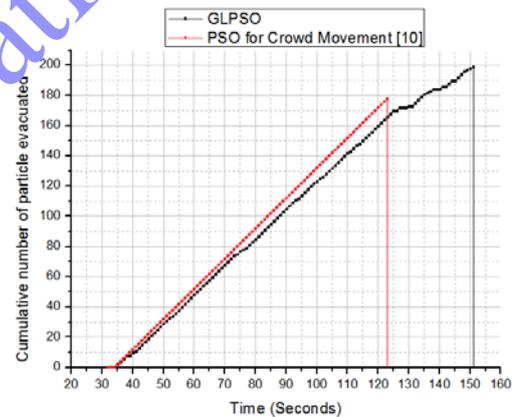

(c)

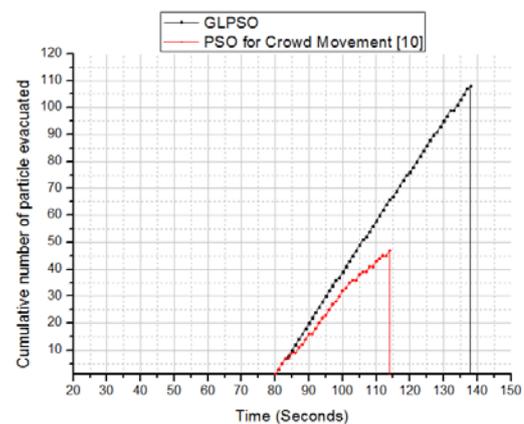

(d)

Figure 15. Cumulative evacuees passing through (a) exit 1, (b) exit 2 (c) exit3 and (d) exit4. (Allocation of 780 people to four exits)

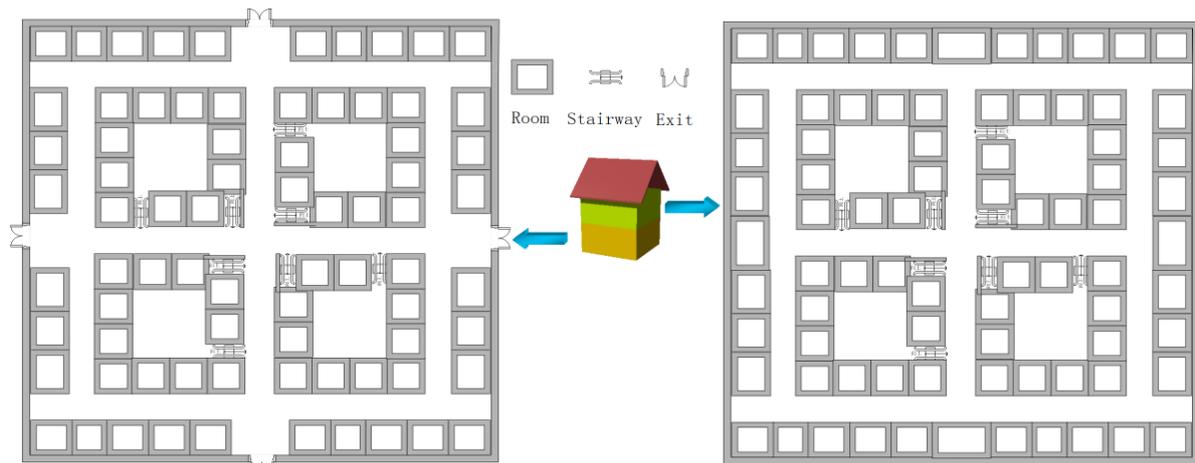


Figure 16. An egress structural Layout

#### 4. Conclusions

In summary, we have presented a global and local optimization method (GLPSO) which combines the filled function method and the Particle Swarm Optimization (PSO) algorithm for the evacuation routing optimization problem in complex scenarios. This method seeks to find the global minimum of the evacuation time using filled function methods. The improved NRS method obtains a global optimum node and a local optimum node with the global optimum particle distribution. The two nodes guide particles to their own best-known positions in the search-space from a macroscopic point of view. We have demonstrated that under different scenarios, GLPSO takes full advantage of multiple exits to reduce evacuation and congestion times. In addition, we proposed three methods to manage the competition for space in GLPSO. These methods simulate particle movement and optimize competition behavior on the micro level. GLPSO has been established to examine how the rational evacuation planning of the evacuees will affect the evacuation process. Our results provide compelling evidence for a global/local optimization in emergency evacuation, which are effective in maximizing the evacuation efficiency and optimized competitive behavior. Further works will need to examine the effect of familiarity and environmental stimuli as well as accident prevention effect on multi-exit selection.

#### Acknowledgment

This work is supported by the National Natural Science Foundation of China (Grant No. 61202307), Natural Science Research Foundation of Jilin Province of China (20140101181JC), Natural Science Research Foundation of Jilin Province of China (20140520071JH).

#### References

- [1] Beena R. and Sarala S., "An Efficient Specific Update Search Domain based Glowworm Swarm Optimization for Test Case Prioritiz," *The International Arab journal of Information Technology*, vol. 12, no. 6, pp.1-7, 2015.
- [2] Chooraman N., Peter J., Lawrence and Edwin R G., "An agent based evacuation model utilising hybrid space discretisation," *Safety Science*, vol. 50, no. 8, pp. 1685-1694, 2013.
- [3] Dong L. and Jorge N., "On the limited memory PFGS method for large scale optimization," *Mathematical Programming*, vol. 45, no. 3, pp. 503-528, 1989.
- [4] Dongmei S. and Binghong W., "Evacuation of pedestrians from a single room by using snowdrift game theories," *Physical Review E*, vol. 87, no. 2, pp. 0228021-0228026, 2013.
- [5] Ha V., Lykotrafitis and George, "Agent-based modeling of a multi-room multi-floor building emergency evacuation," *Physica a-Statistical Mechanics and Its Applications*, vol. 391, no.8, pp. 2740-2751, 2012.
- [6] Hartarto J., Mochamad H. and Ketut Eddy Purnama I., "Multi Agent With Multi Behavior Based on Particle Swarm Optimization (PSO) for Crowd Movement in Fire Evacuation," *Intelligent Control and Information Processing (ICICIP)*, 2013 Fourth International Conference, pp. 366 – 372, 2013.
- [7] Hoogendoorn S. and Bovy P.H.L., "Simulation of pedestrian flows by optimal control and differential games," *Optimal Control Applications & Methods*, vol. 24, no. 3, pp. 153-172, 2003.
- [8] Izquierdo J., Montalvo I., Pérez R. and Fuertes V.S., "Forecasting pedestrian evacuation times by using swarm intelligence," *Physica A*, vol. 388, no. 7, pp. 1213–1220, 2009.

- [9] Jason S., David W. and Ming L., "Interactive Hybrid Simulation of Large-Scale Traffic," *ACM TRANSACTIONS ON GRAPHICS*, vol. 30, no. 6, pp. 1-18, 2012.
- [10] Jiyeong L. and Meipo K., "A combinatorial data model for representing topological relations among 3D geographical features in micro-spatial environments," *International Journal of Geographical Information Science*, vol. 19, no. 10, pp. 1039-1056, 2005.
- [11] Liansheng Z., Chikong N., Duan L. and Weiwen T., "A new filled function method for global optimization," *Journal of Global Optimization*, vol. 28, no. 1, pp.17-43, 2004.
- [12] Matthew M. and Yong Seog K., "Modeling emergency evacuation of individuals with disabilities (exitus): An agent-based public decision support system," *Expert Systems with Applications*, vol. 39, no. 9, pp. 8300-8311, 2012.
- [13] Parlak Ayse I., Lambert James H., Guterbock Thomas M. and Clements Janet L., "Population behavioral scenarios influencing radiological disaster preparedness and planning," *Accident Analysis and Prevention*, vol. 48, no. 9, pp. 353-362, 2012.
- [14] Renpu G., "A filled function method for finding a global minimizer of a function of several variables," *Mathematical Programming*, vol. 46, no. 1-3, pp. 191-204, 1990.
- [15] Tanimoto J., Hagishima A. and Yasukaka T., "Study of bottleneck effect at an emergency evacuation exit using cellular automata model, mean field approximation analysis, and game theory," *Physica a-Statistical Mechanics and Its Applications*, vol. 389, no.24, pp. 5611-5618, 2010.
- [16] Xiaoping Z. and Yuan C., "Conflict game in evacuation process: A study combining Cellular Automata model," *Physica a-Statistical Mechanics and Its Applications*, vol. 390, no.6, pp. 1042-1050, 2011.
- [17] Xiaoping Z. and Yuan C., "Modeling cooperative and competitive behaviors in emergency evacuation: A game-theoretical approach," *Computers & Mathematics with Applications*, vol. 62, no.12, pp. 4627-4634, 2011.
- [18] Xiaoping Z., Tingkuan Z. and Mengting L., "Modeling crowd evacuation of a building based on seven methodological approaches," *Building and Environment*, vol. 44, no. 3, pp. 437- 445, 2009.
- [19] Xiaoshan P., Charies H., Dauber K., Kincho L., "Human and social behavior in computational modeling and analysis of egress," *Automation in Construction*, vol. 15, pp. 448-461, 2006.
- [20] Yaochen Z., Jianqiao C., Junhong W. and Xiwei G., "Modeling of pedestrian evacuation based on

the particle swarm optimization algorithm," *Physica A*, vol. 391, no. 17, pp. 4225-4233, 2012.

- [21] Yaxiang Y., "A Modified BFGS Algorithm for Unconstrained Optimization," *IMA Journal of Numerical Analysis*, vol.11, no.3, pp. 325-332, 1991.



**Zhu Jin-long** was born in 1984. He received the B.E. and M.S. degree in Computer Science and Technology from Jilin University, China, in 2003 and 2007 respectively. His research interest in the area of digital image processing and virtual reality technique. And his research interests include computer algorithms and simulation, evacuation planning, image processing and 3D modelling.



**Li Wen-hui** is a Professor of Jilin University. He received the B.E., M.S. and PhD degree in Computer Science from Jilin University, in 1984, 1987 and 1996 respectively. His research interests include computer vision, image processing and computer graphics.



**Li Hui-ying** is a Lecturer of Jilin University, China. She received the B.E., M.S. and PhD degree in Computer Science and Technology from Jilin University, China, in 2001, 2004 and 2008 respectively. She was a visiting scholar to the Department of Electrical and Computer Engineering at University of Hannover from 2007 to 2009. Her research interests include computer algorithms and simulation, image processing and 3D modelling.



**Wu Qiong** was born in 1990. She received the B.E. degree from Changchun University of Information and Computing Science in 2009. And he is now pursuing the M.E. degree in the Computer Application Technology, Jilin University of Computer Science and Technology from 2013. His research interests include digital image processing and virtual reality technique. And he is now studying for evacuation planning.



**Zhang Liang** was born in 1989. He received the B.E. degree from Changchun University of Information and Computing Science in 2009. And

he is now pursuing the M.E. degree in the Computer Application Technology, Jilin University of Computer Science and Technology from 2013. His research interests include digital image processing and virtual reality technique. And his research interests include computer algorithms and simulation, evacuation planning, image processing and 3D modelling

Online Publication  
IAJIT First